


SUPPORTED BOOM LOADER - E2025



Our E2025 Supported Boom Loaders are the most versatile of all top loading arms. They provide the greatest mis-spot capability and allow for the greatest reach, see spotting map.

Easy to adjust, super smooth action spring cylinder balance, heavy duty capacity swivel joints and a custom boom support enable these arms to reach even further than the E2022 unsupported boom loader. The standard supported boom loaders have a reach of up to 16 feet, longer reaches and special requirements are available.

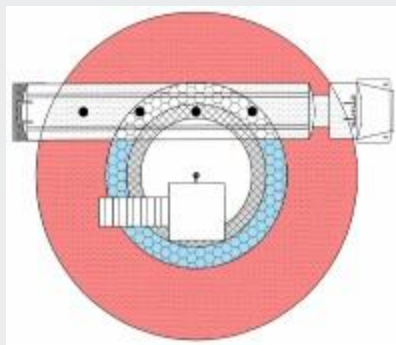

Standard arms feature the [D2000](#) World Series Swivel Joint, a heavy duty, low profile joint.

A variety of seal configurations and elastomers ensure long life performance for each specific application.

SPECIFICATIONS

Pipe size: 2" through 12"

Materials of liquid path:Carbon steel

Carbon steel /Aluminum

Stainless steel

Standard vertical range of movement:+55 deg (park position) to -20 deg (loading position)

A World Series spring cylinder can provide up to 95 deg of full movement if required.